

Say hello to the new

ZOE



Introduction to the new ZOE version 2026.

The new ZOE merges the ZOE SED & ZOE COMPETITION into one version.
A new platform which elevates the modularity even in our access model.

SANREMO
COFFEEMACHINES



model range



2 GROUP COMPACT

530 mm



2 GROUP STANDARD

720 mm



3 GROUP STANDARD

950 mm




SIDE VIEW

530 mm

WEIGHT

	2 GR COMPACT	2 GR	3 GR
net weight	45 Kg	55 Kg	69 Kg
gross weight (with shipping crate)	51 Kg	59 Kg	73 Kg

**tall
cup
version**

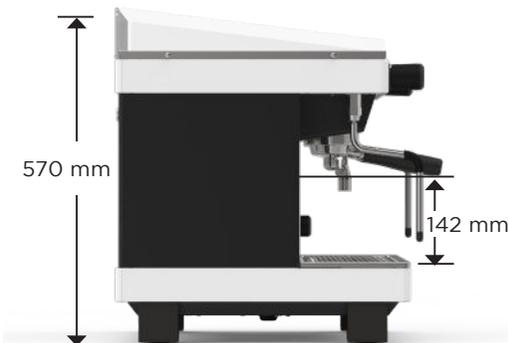

TALL VERSION

530 mm



standard features

NEW STEAM KNOB

Better grip, design and serviceability

NEW KEYPAD

Integrated shot counter keypads also handle programming functions.

GROUP FLUSHING & AUTOMATIC CLEANING CYCLE

With a simple press of the manual button, a small quantity of water is dispensed to keep the group clean at all times. Programmable automatic cleaning cycle.

HOT WATER

Dedicated button with dual programmable doses

LED SPOTS

Activable by the keypad

PREINFUSION

Delayed activation of group solenoid. Independent for single/double shots.

extra features



ADVANCED ELECTRONICS

New keypads & main control board are combining, in addition to the reliability, new features for an easier programming.

- More intuitive technical -programming menu for activating various features, making the experience more enjoyable.
- Expanded keyboard shortcuts.
- Added alarm codes displayed on the screen.
- New quick menu for preinfusions.

FRAME AND INTERNAL LAYOUT

Easy removable panels to increase accessibility; internal layout improved for the serviceability of all components.

DUAL GAUGE WITH NEW PUMP

New high-performance pump's motor.

Dual gauge Boiler and pump pressure; now more visible

NEW DRIP TRAY AND DRAIN BOX

Realised in a press-forming process with rounded internal edges for easier cleaning; supported by specific bumpers to protect the frame from scratches. The new drain box improves the draining capability.

NEW LEGS

Large legs with integrated and adjustable rubber feet

technical data

SERVICE BOILER'S HEATING ELEMENT OPTIONS

	2500 W	2700 W	5500 W				
OPERATING VOLTAGE	Only 230 VAC single phase	230 VAC single phase / 400 VAC phases					
2 GROUPS		Z					
2 GROUP COMPACT	Z						
3 GROUPS			Z				

Z Configurable option

ELECTRICAL RATINGS

	2 GR Compact	2 GR	2 GR	3 GR
OPERATING VOLTAGE	Only 230 VAC single phase version		30 VAC single/ 400 VAC three phases	
TOTAL MAX POWER / BOILER HEATING ELEMENT	2900 / 2500 W - 12A*	3200 / 2700 W - 14A	3200 / 2700 W - 14.0A	6100 / 5500 W - 26A
HYDRAULIC CIRCUIT	HEAT EXCHANGER			
STEAM BOILER HEAT MANAGEMENT	Adjustable mechanical pressostat			
SERVICE BOILER CAPACITY	Copper / 7L	Copper / 9L	Copper / 9L	Copper / 12.5L
PUMP'S RATING	Motor 250 W_Pump capacity rated 150L/h			
CUP WARMER POWER RATING	60 W	200 W	200 W	250 W

* power cord available with cord

ZOE

steam system

Simple and intuitive, the new generation milk frothing system delivers perfect results with both dairy and plant-based milk.



EASE OF USE

Automatically froths milk at the touch of a button; adjust temperature, foam quantity, and texture directly from the display.

Up to two different recipes (example):

One click => recipe 1, Dairy Milk Flat White

Double click => recipe 2, Oat Milk Cappuccino

FULLY INTEGRATED

Built into the machine for optimal ergonomics and space efficiency.

FLEXIBLE

Program up to two recipes for consistent, high-quality results anywhere.

MINIMAL TRAINING

Quick to set up and easy for anyone to use, saving time and training costs.

SANREMO
COFFEEMACHINES

standard colours



FULL BLACK



FULL WHITE



BLACK & WHITE



STAINLESS STEEL



NO DRAMA
JUST COFFEE

ZOE