





ENERGY SAVING SYSTEM

Insulation and smart energy management to save up to 30% of energy

PERFORMANCE Silky milk at high capacity

EASY SERVICE Fast access to the internal parts for rapid and simple

technical service



VOLUMETRIC PUMP PERFORMANCE

The unique 79.3 US gal - 300 l/h pump guarantees constant pressure in all conditions of machine use

HIGH RESOLUTION **VOLUMETRICS**

Deliver greater accuracy and precise programmable dose settings

SANREMO

Take a ride,

explore its essence



Smart-touch setting of the individual groups



EVERYTHING UNDER CONTROL

System digital display to provide visibility of all working parameters



HEART **OF STEEL**


For maximum thermal stability:

- Groups in AISI 316L, weight 17.6 lb / 8 kg each
- Portafilters AISI 316L
- Boilers AISI 316

ADJUSTABLE WORK SURFACE

Innovative Sanremo "All in one" suspension system that allows cups of different shapes and heights (adjustable from 3.35 to 5.90 inches / from 85 to 150 mm)





Flowactive System: for precise control of the water flow and pre-infusion time



Characteristics



AISI 316L STEEL GROUPS WITH 17.6 lb / 8 kg PURE STEEL

Exclusive Sanremo design ensure exceptional thermal stability and maximum resistance to oxidation and lime scale.



AISI 316L STAINLESS STEEL **PORTAFILTER WITH** "COMPETITION FILTER"*

Exclusive Sanremo design, with shape and volume designed to capture the best coffee aromas and fragrances.



AISI 316L STAINLESS STEEL FREE MOTION STEAM TAPS Flexible control system for producing




AISI 316L STAINLESS STEEL STEAM WAND "COOL TOUCH"

Anti-scald wands even in conditions of prolonged use, fitted with "Latte Art"* high-performance steam terminals.



PROGRAMMABLE ELECTRONIC PRE-INFUSION

Allows control with 0.1 second tolerance of the flow of water that wets the coffee bed, with programming of 4 different profiles for each group.





SYSTEM DISPLAY Visibility of all the machine functions:

Café Racer, born to run.

Link to the website.

temperatures, pressures and levels.



COFFEE UNIT SINGLE DISPLAY



MIXED INFUSION HOT WATER FOR TEA AND HERBAL TEAS

Instantaneous mixing of fresh water and steam for a better chemical



HIGH PRESSURE VOLUMETRIC PUMP 79.3 US gal - 300 l/h ***

The unique pump guarantees constant pressure in all conditions of machine use (prolonged and simultaneous activation of several functions and units).



HIGH RESOLUTION VOLUMETRICS

Deliver greater accuracy and precise programmable dose settings.



STEAM CONTROL ADJUSTABLE **ELECTRONIC PRESSURE SWITCH**

Sensor with 0.02 bar precision that allows the chosen pressure and steam in the boiler to be kept constant in all conditions of use.



PROGRAMMABLE CUP-HEATER TEMPERATURE

Allows the cups to be kept at the optim temperature in the most different



ADJUSTABLE HEIGHT WORK SURFACE

Innovative Sanremo "All in one" suspension system that allows the use of cups and glasses of different shapes and heights.



LED LIGHTING OF THE WORK SURFACE

Allows efficient working in any condition of environmental lighting



AUTO-DIAGNOSIS, STATISTICAL DATA, SCHEDULED MAINTENANCE

Maintenance can be scheduled according to litres or number of coffees dispensed.




AUTO-ON, AUTO-OFF AND DAY-OFF FUNCTION Programmable on-off timer for each day and/or daily timetables



PROFESSIONAL CLEANING CYCLE Guided procedure for cleaning the coffee units.



BOILER WATER REGENERATION



Optional



NAKED **PORTAFILTERS**




HIGH POWER STEAM SPOUTS



Café Racer

Models

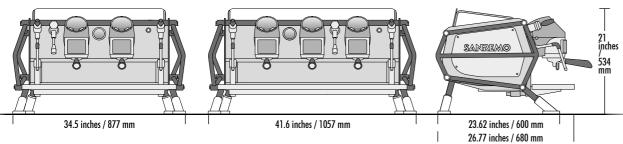

- 2 group CR 2 steam taps
- 1 water tap
- 1 one-cup portafilters
- 2 two-cup portafilters

3 group CR 2 steam taps

- 1 water tap
- 1 one-cup portafilters
- 3 two-cup portafilters








_Technical data		2 group	3 group
voltage	٧	230/240 1N /	380/415 3N
power input	kW	7.03	8.35
steam boiler capacity	US gal / lt	2.11 / 8	2.64 / 10
services boiler resistance power	kW	3.85	3.85
external pump power	kW	0.165	0.165
preheating boiler capacity	US gal / It	0.264 / 1.0	0.396 / 1.5
preheating boiler resistance power	kW	1.0	1.5
cup-heater power	kW	0.16	0.2
units boiler capacity	US gal / It	0.264 / 1.0	0.396 / 1.5
units boiler resistance power	kW	1.6	2.4
net weight	lb / kg	214 / 97	265 / 120
gross weight (with shipping crate)	lb / kg	267 / 148	377 / 171



Sanremo Café Racer multiboiler system ensures a new level of thermal precision thanks to the 4 points of temperature PID control



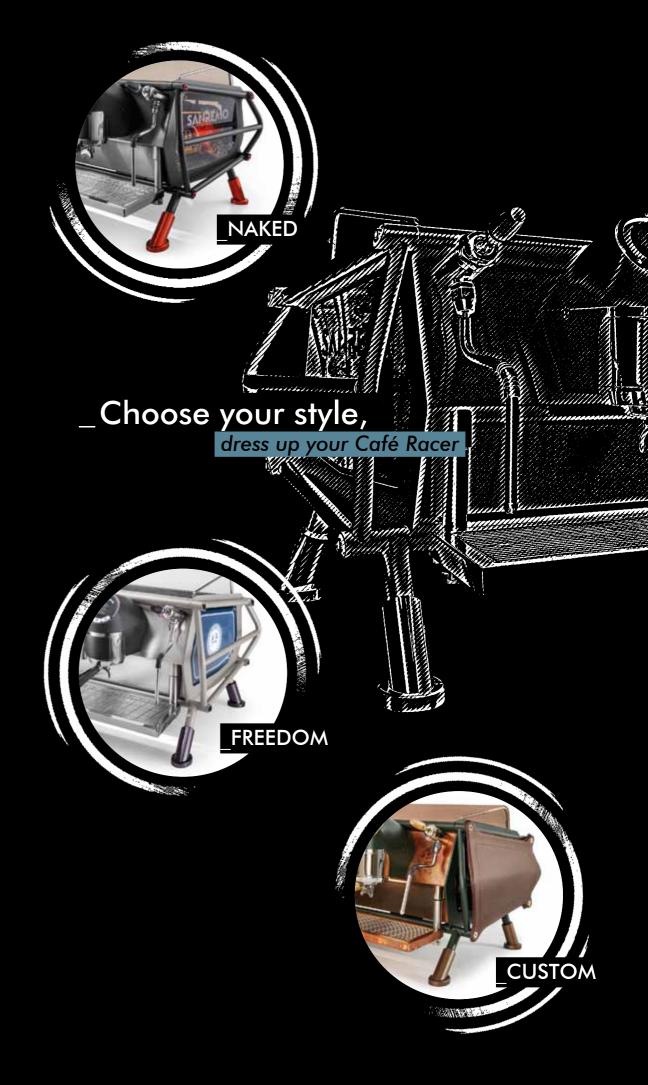

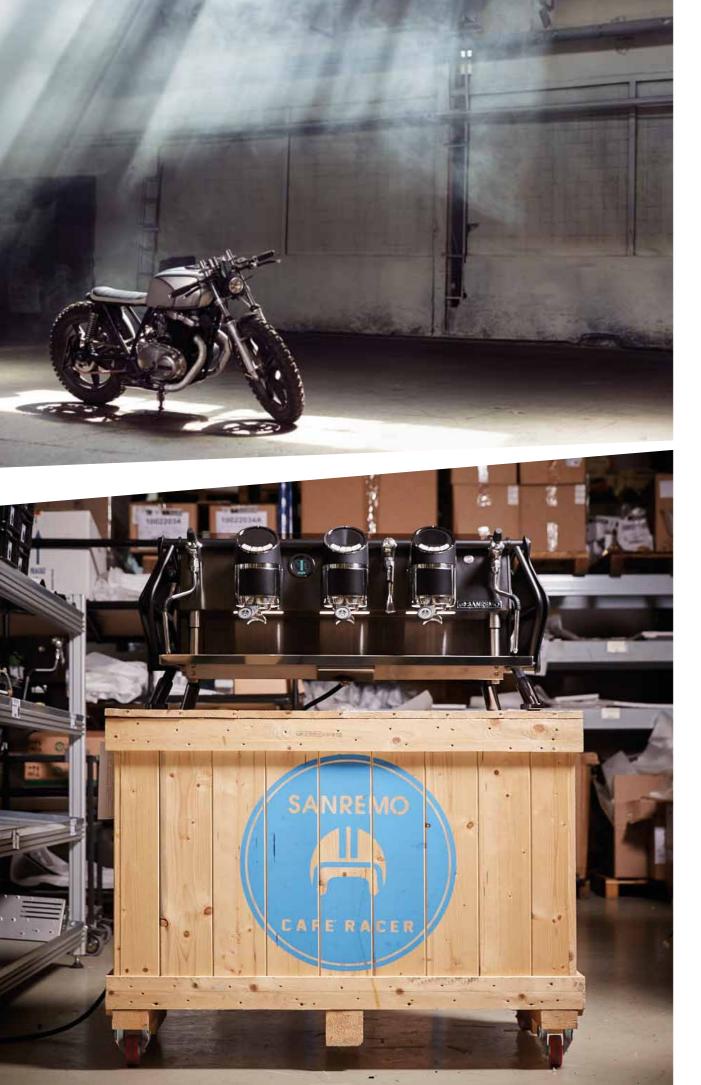

Built for free spirits

Sometimes designs come to be to achieve a precise objective; other times to make a dream come true; or to follow an ambition.

But this is our story of a coffee machine conceived in absolute freedom.

No hurry, no restraints, no obligations:

except to guarantee impeccable performance to baristas all over the world.

Hence the precise and accurate intuition: to enclose the best of Sanremo technology in a sturdy and stylish chassis: like a motorcycle chassis of the legendary café racer.





From the idea, to the design, to the Sanremo R&D team, to SWAT (Sanremo World Academy Team): the project has gone around the world a couple of times. It has been shared with the best operators in the industry and it has become a reality.

Café Racer by Sanremo is a powerful and reliable machine, easy-to-handle, versatile and stylish.

A unique, high performance coffee machine, ready to be desired by all coffee professionals.





NAKED

look into the soul



With its unmistakable transparent sides, the **Naked Café Racer** allows you to see its powerful heart of pure stainless steel.

The chassis is a sturdy frame with a functional design, supporting and enhancing the essence of the coffee machine.

The Naked Café Racer is available in 2 finishes: black and steel.

Both available with some components in black or red.





Naked Steel



☑ Naked Steel



FREEDOM

options to fit any character
















components.







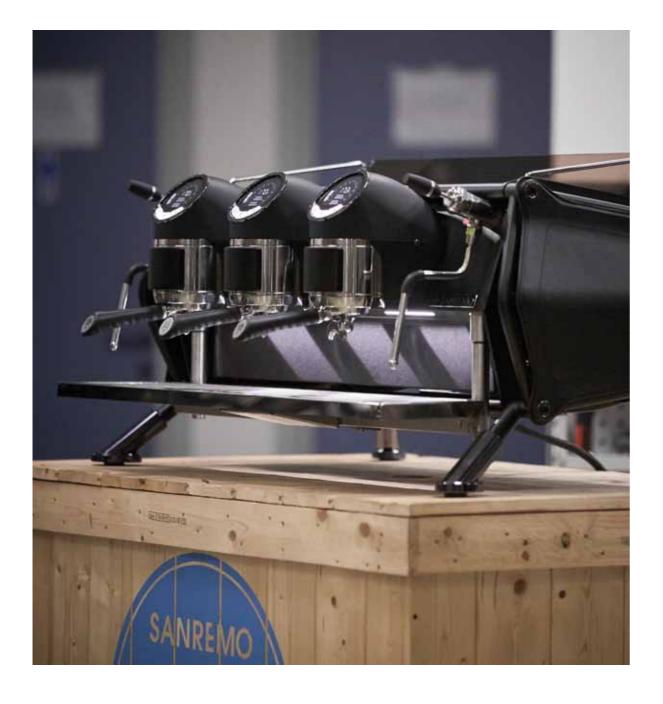





CUSTOM

welcome free spirits



Step into the garage: where you can have fun outfitting **your Café Racer**. Our R&D team is at your disposal to personalize the finishes that represent you best.

It will be love at first sight.

For example:

. The **Renegade Café Racer**, with leather sides, a green chassis, bronze finishes and olive wood portafilter handles.

. The **Dolomiti Café Racer**, completely black edition with black leather sides.









Pre-infusion made to measure

easily navigate the grouphead display

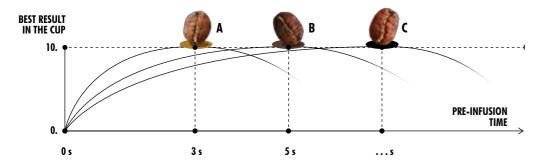


Examples of different coffee types: BLEND / B SINGLE ORIGIN / C

Every single origin or coffee blend has different requirements. For a perfect and homogeneous extraction of coffee solubles, it is fundamental to be able to control the elements of pre-infusion.

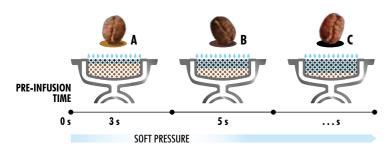

Pre-infusion is the first phase of espresso brewing. Its primary function is to saturate and prepare the coffee bed for optimal extraction. Pre-infusion also allows uniform delivery and aids in preventing channeling.

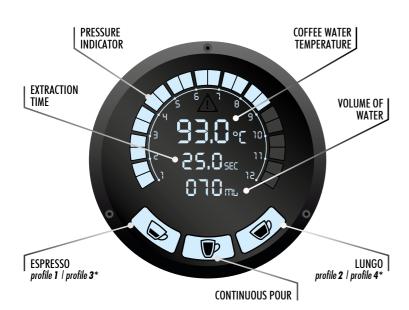

STAND-BY



Through the display you can easily program each group for:

- pre-infusion time
- volume of water for extraction
- temperature

For each group you can save 4 different profiles, as well as the continuous dispensing function.



Everything under control


discover the functions of the digital system display

A look is all it takes: pressure, temperature and water levels are constantly monitored by high-precision electronic sensors, which immediately show real-time values and volumes with absolute reliability.

The display is also a handy programming interface for the maintenance technician.

The display allows the barista to:

- · check and program the pressure, temperature and water levels
- collect statistics of the number of coffees, water dispensed, water consumed
- program days and times for switching on and off
- receive warnings for cleaning, washing and component malfunctions
- schedule maintenance
- carry out auto-diagnosis

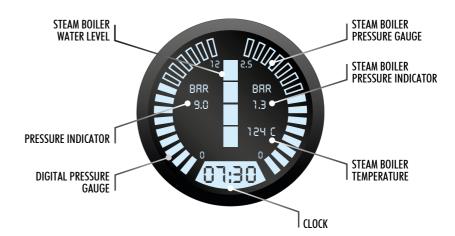

Foam with an artist's touch

high-performance steam function



Use the best Sanremo technology, with impeccable performance, to give free rein to your creativity:

- dedicated steam boiler
- free motion steam taps
- cool-touch steam wand
- high capacity and fast recovery



STANDARD SELECTION > two profiles

* DOUBLE PRESS > four profiles



For more information about our coffee machines please contact us at export@sanremomachines.com











SANREMO

SANREMO coffee machines s.r.l. Via Giacomo Bortolan 52 31050 Vascon di Carbonera [TV] — ITALY T +39 0422 448900 F +39 0422 448935 www.sanremomachines.com